


 ÖZKAR





# Global Trust & Local Sincerity



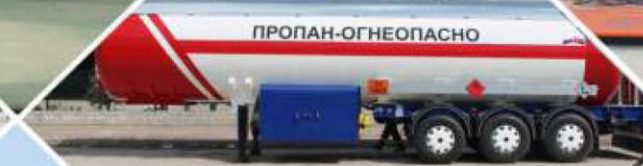



## BOBTAIL

CAPACITY : 10 m<sup>3</sup> to 34 m<sup>3</sup>  
STANDARD : ADR , EN 12493 , EN 14025



## SEMI TRAILER TRANSPORT TANK

CAPACITY : 36 m<sup>3</sup> to 70 m<sup>3</sup>  
STANDARD : ADR , EN 12493 , EN 14025  
MATERIAL : P355 GH/NH/NL  
P460 NH/NL  
DESIGN PRESS. : ADR , EN 12493 , EN 14025  
UPON CUSTOMER REQUEST  
DESIGN TEMP. : -40 °C..... +70 °C



*Global Trust & Local Sincerity*




**INDUSTRIAL STORAGE**

CAPACITY : 13 m<sup>3</sup> to 250 m<sup>3</sup>  
STANDARD : EN 13445 , AD 2000 MERKBLATTER  
MATERIAL : P355 GH/NH/NL, P460 NH/NL



*Global Trust &  
Local Sincerity*



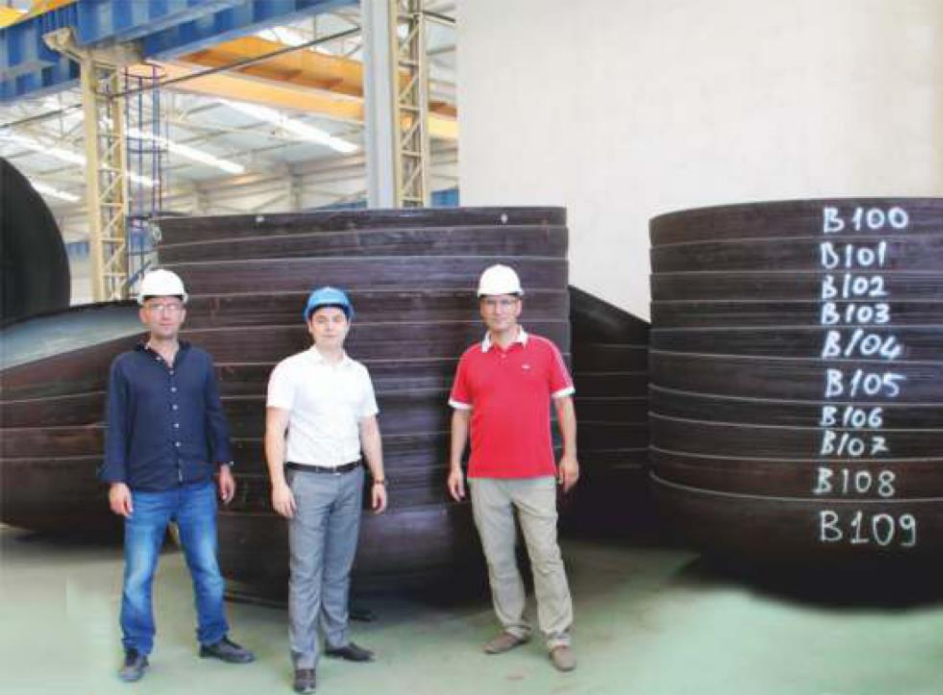



ÖZKAR